



METRIS & 400A PULSAR INSTALLATION INSTRUCTIONS

- REMOVE INDEX COVER (3-screws) and INDEX (2-screws).

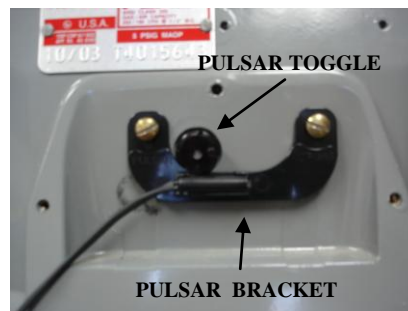

- UNSCREW BRASS TOGGLE ON METER AND REPLACE WITH PULSAR TOGGLE. MOUNT PULSAR BRACKET USING EXISTING INDEX SCREWS
- RE-INSTALL INDEX TO ORIGINAL LOCATION ENSURING TOGGLE IS FITTED INTO INDEX

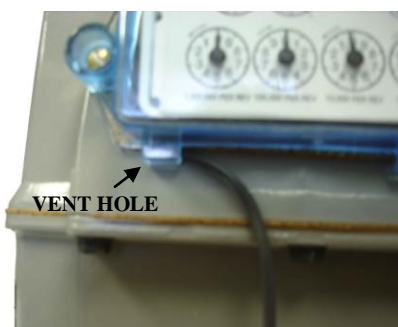

- RE-INSTALL INDEX COVER, ENSURE THE CORK GASKET IS AGAINST THE METER AND ROUTE THE WIRE THROUGH THE VENT HOLE OF THE INDEX.

PULSAR SPECS

Pulse Value:	1 Ft ³
Max. Power:	10 W
Max. Switched Current:	50Ma
Max. Switching Voltage:	200Vdc
Contact resistance:	20mOhm
Temperature Range:	-40°F – 220°F